



FOGMAKER

TRIPLE ACTION³

AUTOMATIC FIRE SUPPRESSION SYSTEM
WITH HIGH-PRESSURE WATER MIST

AUTOMATIC FIRE SUPPRESSION SYSTEM
PROTECTING SPECIALIZED PURPOSE-BUILT VEHICLES (SPBV)



THE CHALLENGE

SPECIALIZED PURPOSE-BUILT VEHICLES (SPBV)

SPBV's are designed and equipped to operate in rugged, high risk and often explosive or volatile environments. Although these vehicles are structurally designed to protect their occupants from external threats, the danger of an external or internal fire could result in the vehicle being stranded, the occupants being trapped inside or them having to vacate the vehicle and expose them to the situation in which they operate. Don't be caught off guard! Remove the element of surprise with FOGMAKER's automatic fire detection and suppression system. Protect your fleet and your employees by installing our reliable fire suppression system to cover your vehicle's engine compartment, tyres and internal operator cabin.

Due to the fact that these vehicles engine compartments are often enclosed and encapsulated with bullet proof steel to protect them from explosive devices, the engine compartment operates at higher temperatures increasing the risk of an engine fire. A Molotov petrol grenade or Molotov cocktail thrown to target the vehicle's tyres needs to be quickly neutralised before the fire develops to a point where a tyre fire is almost impossible to extinguish. An ignited engine or tyre fire could strand the vehicle or spread to the internal operator cabin and rapidly lead to a disastrous series of events. FOGMAKER's automatic fire suppression system with several manual activation options ensures that the operators and occupants of SPBV's have the peace of mind to focus on their critical mission.

A PROVEN FIRE SUPPRESSION SOLUTION

FOGMAKER is the holder of several global certificates and approvals.



ISO 9001 and 14001



UL 1384



AS-5062 (Australia)



SBF-127 / 128 (Scandinavia)



SPCR 197



FIA




IATF



FM 5970 (pending)

THE FIRE TRIANGLE

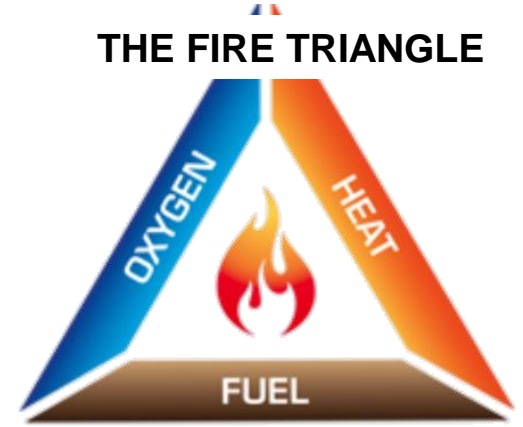

FOGMAKER's fire suppression system effectively attacks all three sides of the fire triangle. We call this unique performance **Triple Action**³.

**1
OXYGEN**

Micro droplets of water-based extinguishant are generated by patented nozzles under high pressure. These droplets flood the area being protected and evaporate immediately on contact with heat. During the evaporation process, 1 litre of water will expand into 1700 litres of water vapour, which displaces air and stops the oxygen supply to the fire.

**2
HEAT**

During the vaporization process the water mist cools the hot gases and hot surfaces in the engine compartment. It takes 1 calorie to heat up 1 gram of water by 1 °C, but 540 times more energy to evaporate the same amount of water. The cooling achieved by this vaporization reduces the risk of re-ignition

**3
FUEL**

FOGMAKER's suppressant also includes, in low concentrations, an Aqueous Film Forming Foam (AFFF), which forms a protective barrier on the surface of any flammable material or fuel, thus preventing the fuel from being available for combustion.


ASSET PROTECTION

Mitigating the risk of an **engine fire** with FOGMAKER's **automatic fire suppression system** is the best way to protect your fleet of valuable assets from the **threat of fire**.

FOGMAKER is fast becoming the **fire protection solution** of choice, and is trusted by many owners of heavy **vehicles** and **mobile industrial machinery** to safeguard their machines, save operator lives and protect the environment in which they are working.

The FOGMAKER fire suppression system is developed and manufactured in Sweden. FOGMAKER has a successful global track record in Europe, Australia, North and South America, Middle East and Africa – with over **200,000 units installed worldwide** since 1995.


“From 870 °C to 136 °C in 10 seconds!”

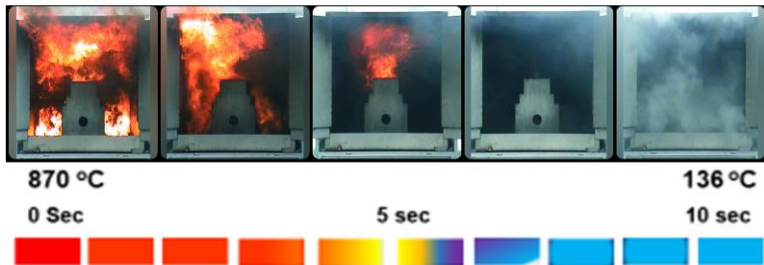

Fire suppression test in a simulated engine compartment with a volume of 2.5 m³. The fire source consists of 4 20cm x 40cm trays filled with diesel. A spray fire is then simulated by applying diesel at a rate of 2 litres per minute at a pressure of 5 bar, which engulfs the engine. The combined heat output of the fire is approximately 1600 kW.



Temperature of burnt gases

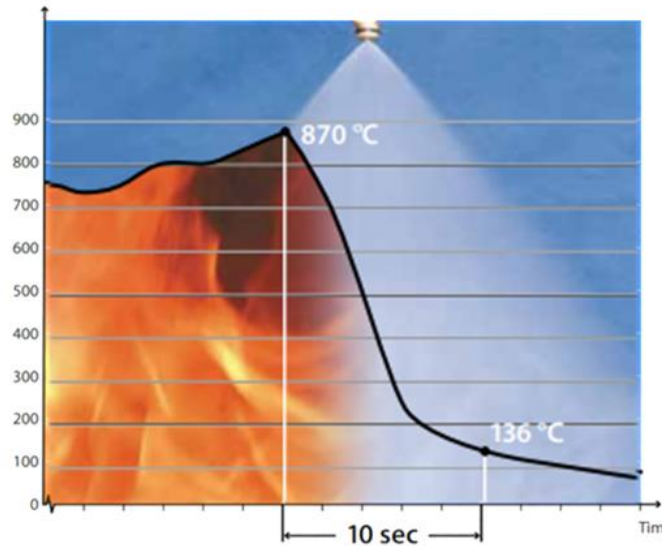

In this simulation the fire is allowed to burn for more than 20 seconds. The burnt gas temperature increases to 870 °C at which point the FOGMAKER system is activated manually. In 10 seconds the temperature of the burnt gases decreases to approximately 136 °C. In addition to the rapid extinguishing the risk of re-ignition is minimized. This means reduced repairs and downtime.

WHY FOGMAKER ?

- **Extremely effective** - Triple Action³ fire suppression system attacks all 3 sides of a fire triangle.
- **Automatic fire suppression system** - using loss of pressure (LOP) technology. No electric power required.
- **Simplicity** - Minimal obstruction, low weight and orientation independent.
- **Easily installed** - within one working day by our FOGMAKER Field Engineers.
- **Low life-cycle cost** - Periodic inspections and major service every 2 years (MHSA) or 3 years (PER).
- **System monitoring** - including low pressure and fire alarm.
- **Automatic engine shut down** - optional.
- **Easy clean-up and quick recharge** once system has been triggered.



OUR GLOBAL & AFRICAN FOOTPRINT

FOGMAKER SOUTH AFRICA is the **sole distributor for Southern Africa**, with its head office in Johannesburg, South Africa. FOGMAKER South Africa has representative offices in Durban, Cape Town and Steelpoort, as well as in Zambia and Botswana, and has distributor partners based in Ghana, Nigeria and Togo.

At the heart of FOGMAKER South Africa are an amazing team who are **passionate about our product and the customers we service**. What truly differentiates us from our competition is our approach to risk mitigation, our tailored system design, our speedy installation and excellent after-sales service. Our mobile technical consulting team are available to visit you on-site to conduct fire risk assessments, installations and servicing.



FOGMAKER

SOUTH AFRICA

Address :5 Jansen Road,
Witfield,Boksburg,1459,
Gauteng

Email: info@fogmaker.co.za

Website:

www.fogmaker.co.za

FOGMAKER

Johannesburg

Tel: +27 (11) 894 2906

suereka@fogmaker.co.za

FOGMAKER

Cape Town

Mobile: +27 (82) 614 9517

john@fogmaker.co.za

FOGMAKER

Steelpoort

Mobile: +27 64 601 1241

dries@fogmaker.co.za

FOGMAKER

Zambia

Mobile: +260 (97) 625 2082


sangu@fogmaker.co.za

FOGMAKER

Botswana

Mobile: +26 (77) 486 2948

llewelyn@fogmaker.co.za

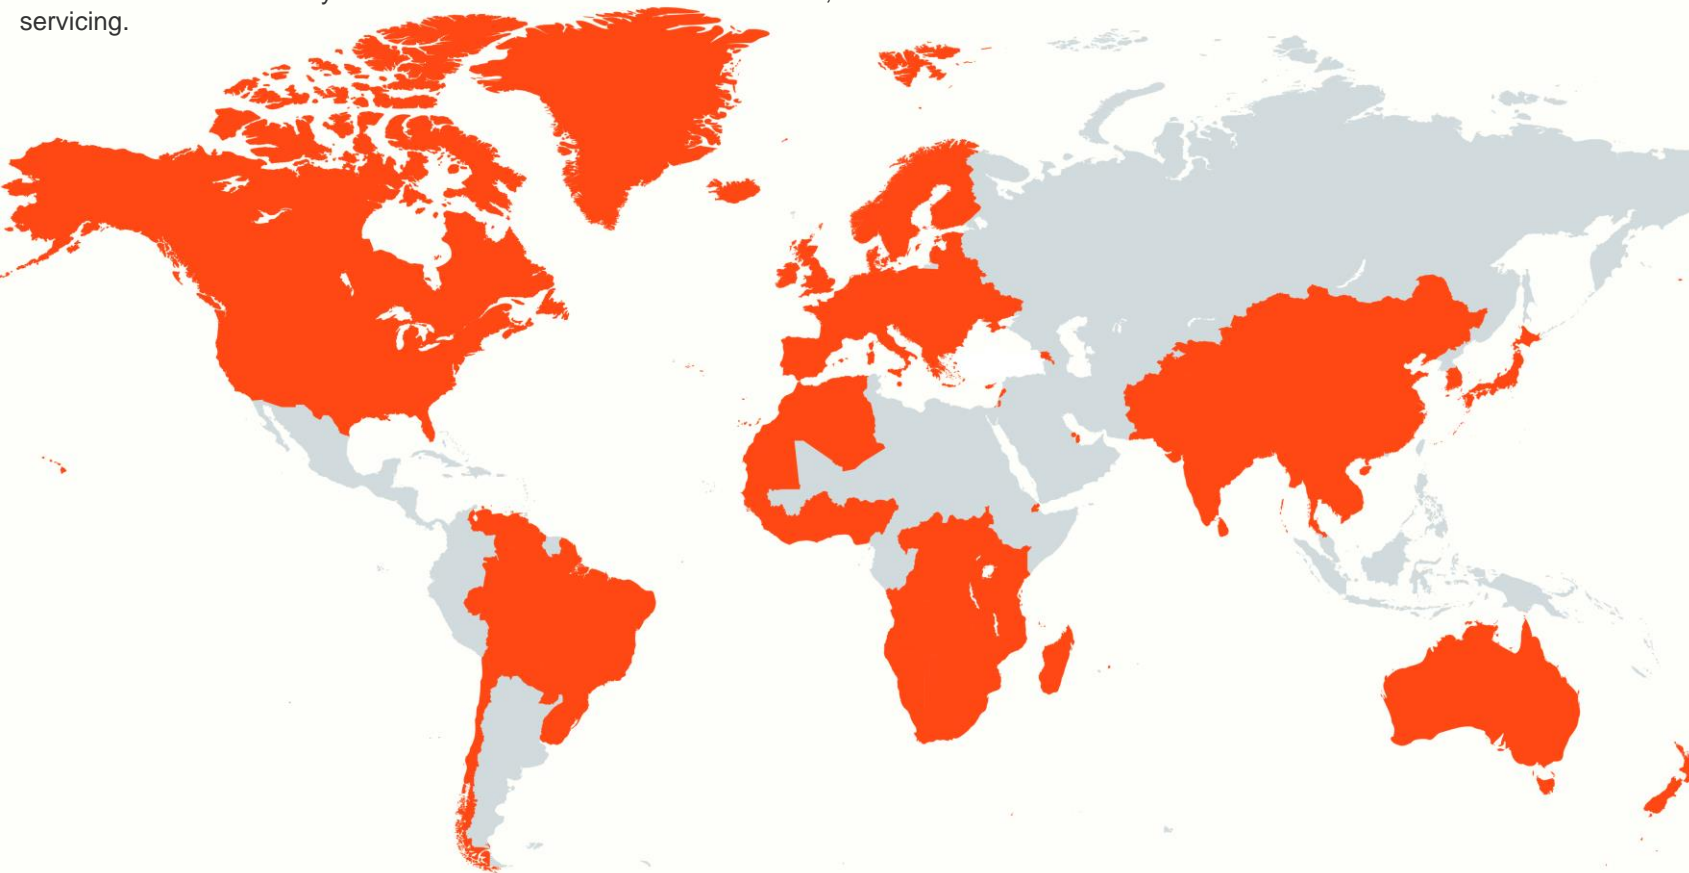

PURE PERFORMANCE WITH TRIPLE ACTION³

